

Setup Guide





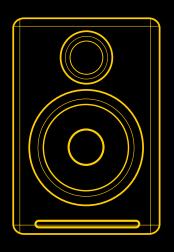

Premium Powered Desktop Speakers



Contents

Introduction	Page 3
Unpacking	Page 3
What's in the box	Page 4
Cleaning	Page 4
Placement	Page 5
Features	Page 5
Setup and Operation	Page 6
Basic Troubleshooting	Page 1
Warranty	Page 13
Specifications	Page 15
About Audioengine	Page 16
Support	Page 16



Basic Safety Instructions

- Read these instructions for all components before using this product.
- · Keep these instructions for future reference.
- Heed all warnings on the product and in the owner's guide Follow all instructions.
- Do not use this apparatus near water or moisture. Do not use this product near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, near a swimming pool, or anywhere else that water or moisture are present.
- Clean only with a dry cloth and as directed by the manufacturer. Unplug this product from the wall outle before cleaning.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions. To ensure reliable operation of the product and to protect it from overheating, put the product in a position and location that will not interfere with its proper ventilation. For example, do not place the product on a bed, sofa, or similar surface that may block the ventilation openings. Do not put it in a built-in system, such as a bookcase or a cabinet that may keep air from flowing through it's ventilation openings.
- Do not install near any heat sources, such as radiators, heat registers, stoves or other apparatus that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wider blade or third prong are provided for your safety. If the provided plug does not fit in your outlet, consult and electrician for replacement of the obsolete outlet.
- Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments or accessories specified by the manufacturer.
- Use only with the cart, stand, tripod, bracket or table When a cart is used, use caution when moving the cart/apparatus

combination to avoid injury from tip-over.

- Unplug this apparatus during lightning storms or when unused for long periods of time to prevent damage to this product.
- Refer all servicing to qualified service personnel.
- Servicing is required when the apparatus has been damaged in any way such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Do not attempt to service this product yourself. Opening or removing covers may expose you to dangerous voltages or other hazards. Please contact the manufacturer to be referred to an authorized service center near you.
- To prevent risk of fire or electric shock, avoid over loading wall outlets, extension cords, or integral convenience receptacles.
- Do not let objects or liquids enter the product as they may touch dangerous voltage points or short out parts that could result in a fire or electrical shock.
- · See product enclosure bottom for safety related markings.
- Use Proper Power Sources. Plug the product into a proper power source, as described in the operating instructions or as marked on the product.
- Avoid power lines Use extreme care when installing an outside antenna system to keep from touching power lines or circuits, as contact with them may be fatal. Do not install external antennas near overhead power lines or other electric light or power circuits, nor where an antenna can fall into such circuits or power lines.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: This device may not cause harmful interference and this device must accept any interference received, including interference that may cause undesired operatio.



REFER SERVICING TO QUALIFIED PERSONNEL



Introduction

Welcome to the Audioengine family and congratulations on your purchase of the A2+ Premium Powered Desktop Speakers. The Audioengine team is dedicated to bringing you the highest quality listening experience possible and the A2+ is designed with the same attention to detail and operational simplicity as other Audioengine products. Our goal is to get you to your music as simply as possible without all the "gadget tinkering" that other products generally require. As with our other past efforts, we thank all our customers and resellers for helping us create another great Audioengine product!

Unpacking

Your Audioengine speakers were carefully tested and inspected before packaging and shipping. After unpacking please check for any damage. It is rare that a unit is damaged during shipping, but if this does happen contact the shipping company immediately. We recommend that you keep the original carton and packing material for any possible future shipping.



Whats in the box

- (1) A2+ powered (left) speaker
- (1) A2+ passive (right) speaker
- (1) Speaker wire, 2 meters (~6.5 feet)
- (1) Power supply
- (1) Power cord
- (1) Mini-jack audio cable, 1.5 meters (~5 feet)
- (1) USB cable, 1.5 meters (~5 feet)
- (2) Microfiber speaker bag
- (1) Microfiber power supply bag
- (1) Microfiber cable bag
- (1) Setup guide
- (1) Product line brochure

Cleaning

Your A2+ speakers are designed for years of use with no maintenance as long as you avoid exposure of the speakers to moisture or high temperatures. The hand-finished MDF wood cabinets are very durable and are easily cleaned by wiping down with a soft, dry cloth. We do not recommend using cleaners or solvents.

Placement

Place your Audioengine 2+ speakers at a comfortable listening location with no obstructions at the front or back. If you find that raising them to an angle produces the best sound, this is easily achieved by adding the DS1 Desktop Stands (available separately).

We recommend at least 3 inches of clearance around the back of the cabinet for good air circulation.


Features


- Built-in power amplifiers
- Dual audio inputs
- USB computer audio input
- Variable audio output
- High-quality connectors
- Custom Kevlar woofers and silk dome tweeters
- Power-saving idle mode
- Hand-built cabinets
- Magnetically shielded
- Cables included



Setup and Operation

Step 1 - Connecting the speaker wire

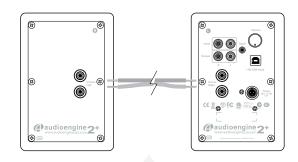

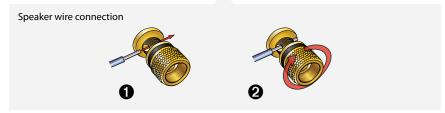

- 1. Use your thumb and finger to unscrew the connectors.
- 2. Insert each speaker wire into the holes on the side of connectors.
- 3. Retighten the connectors with your fingers.
- 4. The bare portion of the wire should be secured firmly in each connector.

Repeat the procedure to connect the other end of the speaker wire to the other speaker. Check to make sure none of the speaker wire strands have come in contact with a nearby connector.

As the A2+ speakers have the power amplifiers built inside, do not connect the speaker terminals to the speaker outputs of a stereo receiver.

Step 2 - Connecting the Power Supply





Verify that the volume/power switch on the rear panel of the left speaker is in the OFF position by rotating it counterclockwise until it clicks off.

- 1. Connect the cable from the power supply to the left speaker rear panel.
- 2. Connect the power cable to the other end of the power supply.




- 3. Connect the power cable to an AC power outlet.
- 4. Verify that the LED indicator on the power supply is illuminated.


Use only the power supply provided with the speakers.

Step 3 - Connecting an Audio Source

Using the appropriate audio cable, connect the speaker inputs to your audio source (computer, iPhone, iPad, etc.). One example is shown in the diagram.

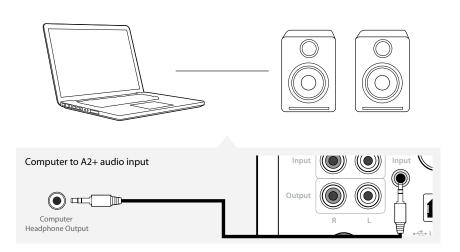

Another option for connecting a computer to A2+ is via USB audio. Using the included USB cable, connect as shown in the diagram.

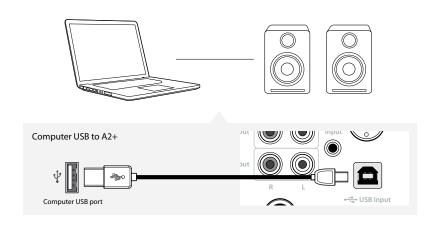

For PC, the A2+ should be recognized automatically.

For Mac, under System Preferences/Sound/Output, select "Audioengine 2+"

For advanced setup tips visit: audioengineusa.com



Step 4 - Enjoying your Speakers

- 1. Turn on the rear panel volume/power knob and set the volume control to about 3 o'clock.
- 2. Turn on your audio source and adjust the volume to your desired listening level.

Two audio sources may be connected to the speakers at the same time. To adjust the volume, we recommend using the individual volume controls on each source.

We recommend using a high-quality surge suppressor and/or AC line filter on all electronics equipment.

Basic Troubleshooting

If the LED indicator on the power supply is not illuminated:

- Check to see that the power cord is securely connected to the power supply and to an AC power outlet.
- Check that the AC power outlet is supplying power.

If the speakers do not produce sound:

- Check that the cable from the power supply is connected to the rear panel, and that the LED indicator on the power supply is illuminated.
- Check that the volume/power knob on the rear panel is not set to minimum volume or powered off (we recommend at least a 10 o'clock position).
- Check that the volume level of your audio source in not set to minimum or powered off.
- Check that the wire from your audio source to your speakers is properly connected (occasionally the 1/8" cable feels as if it is inserted all the way, but is not).

If the speakers produce sound from the left speaker but not the right:

- Check that the speaker wires are correctly connected between the left and right speaker connectors.
- Check that the cable from your audio source to the speakers is



properly connected.

If the sound is distorted:

- Decrease the volume of the input audio source and increase the volume of the speakers.

Warranty

Period

All Audioengine products have a 3-year Limited Warranty on parts and labor from date of purchase. Your warranty is automatic, so there is no need to register. This Limited Warranty applies only to Audioengine products purchased in the Continental United States. For Limited Warranty coverage elsewhere, please contact your Audioengine dealer, reseller, or distributor.

What is covered

All defective parts or faulty workmanship.

What is not covered

The Audioengine Limited Warranty does not cover damage caused by accident, misuse, abuse, neglect, excessive moisture, lightning, power surges, other acts of nature, unauthorized product modification or repairs, or failure to follow the instructions outlined in the Setup Guide.

What we will do

We will repair or replace any defective parts, at our option, within a reasonable amount of time and free of charge any time during the warranty period. After service, we will be responsible for shipping the product back to you at our expense.

What we ask from you

You will be responsible for shipping or transportation charges directly to Audioengine or to an authorized dealer. We recommend that you keep the original shipping materials, as it is important that you package the product so that it will not be damaged during shipping. Audioengine cannot be responsible for any damages incurred during shipping due to poor packing,



so please pack well and make sure to insure your shipment.

How to obtain Audioengine Warranty service If you have any questions about your warranty coverage or you think you may need service, email the Audioengine Authorized Service Center at: support@audioengineusa.com or call toll-free in the United States at: (877) 853-4447. We will do everything we can to answer your questions and resolve any issues as quickly as possible.

Exclusive Remedy

This Limited Warranty is fully transferable provided that the current owner furnishes the original proof of purchase and that furnishes the original proof of purchase and that the serial number on the product is intact. THE MAXIMUM LIABILITY OF AUDIOENGINE SHALL NOT EXCEED THE ACTUAL PURCHASE PRICE PAID BY YOU FOR THE PRODUCT. IN NO EVENT SHALL AUDIOENGINE BE LIABLE FOR SPECIAL, INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES.

Product Returns and Refunds

Your satisfaction is guaranteed! Should you have a problem or are not satisfied with any Audioengine product, send us an email at:

support@audioengineusa.com or call toll-free in the United States at: (877) 853-4447.

General Specifications

Type: 2.0 powered multimedia speaker system

Power output: 60W peak power total (15W RMS /

30W peak per channel), AES

Inputs: 1/8" stereo mini-jack, RCA, USB

Voltages: 110-240V, 50/60Hz auto-switching

Amplifier type: Dual Class AB monolithic

Drivers: 2.75" Kevlar woofers, 20mm silk dome

tweeters

Signal-to-noise: >95dB (typical A-weighted)
THD: <0.05% at all power settings

Crosstalk: <50db

Frequency response: 65Hz-22kHz +/-2.0dB Sensitivity: 88db SPL (1w@1m)

Input impedance: 10K ohms unbalanced

Protection: Output current limiting, thermal over-tem

perature, power on/off transient protection

Dimensions (each): $6''(H) \times 4''(W) \times 5.25''(D)$

Weight (LEFT): 4lbs Weight (RIGHT): 3lbs

Shipping weight: 4.6 kg (~10lbs) per pair Shipping box dims: 10.5'' (H) x 15'' (L) x 7'' (W)

Materials and Construction: 18mm thick MDF cabinets

20mm silk dome tweeters with neodymium magnets

2.75" Kevlar woofers with advanced voice coils



About Audioengine

Audioengine designs and builds innovative audio products with all your music in mind. Great sound, simple but elegant designs, high-quality materials, and truly useful features are what Audioengine is all about. We sincerely hope you get as much enjoyment from our products as we've had creating them! For information about our other products go to: www.audioengineusa.com

Support

If you have any questions or feel you may need service contact the reseller where you purchased your A2+ or feel free to email us directly at:

support@audioengineusa.com or call toll-free in the United States: (877) 853-4447



© 2006-2013 Audioengine Ltd. All Rights Reserved.

Copyright Notice
Audioengine and Audioengine A2+ are trademarks of Audioengine Ltd.